




# 3 TRACKS ELECTRIC TENSIONERS

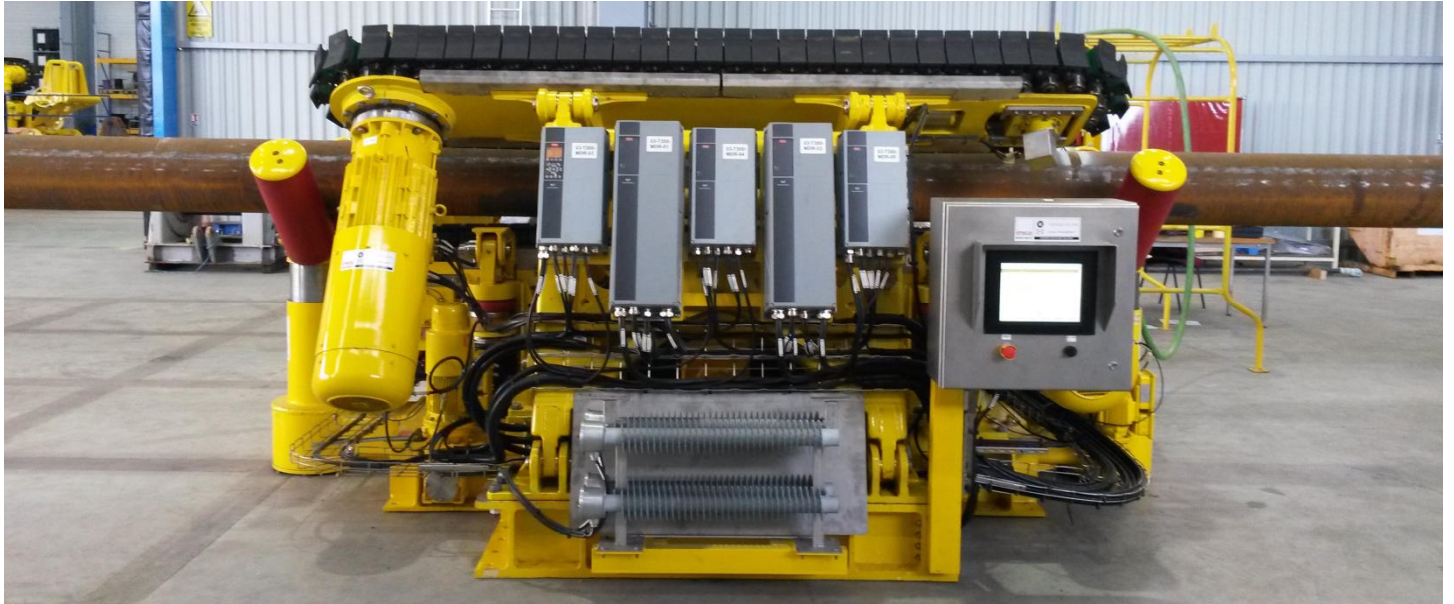

## Highlights

- › Oil and HPU free, leak free, space saving
- › Environment friendly
- › Improved pressure accuracy on pipe 150 kg/m
- › High efficiency
- › Low lifecycle cost
- › Single lift, Plug and play

		15 t
BRAKING	t	20
PULLING POWER SUPPLY		ELEC.
LAYING SPEED HALF LOAD	m/min	33
LAYING SPEED FULL LOAD	m/min	17
PRODUCT TYPE	F / R / U / W	F / R
PRODUCT DIAMETER RANGE	mm	40 > 700
MAX. CLEARANCE	mm	700
CLAMPING FORCE RANGE	t/m	50
CONTACT LENGTH	m	1900
MIN. FRICTION FACTOR		0,15
<b>OVERALL DIMENSIONS</b>		
LENGTH	mm	4 200
WIDE	mm	3 500
HEIGHT	mm	2 100
WEIGHT	t	1,9
*FLEXIBLE / RIGID / UMBILICAL / WIRE ROPE		



Non contractual data | Contact us for details | REEL © 2016

08/12/2016 Data Sheets rev. B