




# 4 TRACKS TENSIONERS



## Highlights

- › Up-to 400T, market's biggest tensioners
- › Squeezing accuracy from 2Te (hydraulic) and 200 kg/m (electrical)
- › Safe squeezing more than 48h powerless
- › Full Open-ability up to 4 m OD around the firing line
- › Upon request: wider openable and retractable clearance
- › Squeezing until 170 Te/m
- › Even pressure on the product through optimized tracks stiffness
- › Could operate from horizontal until vertical position

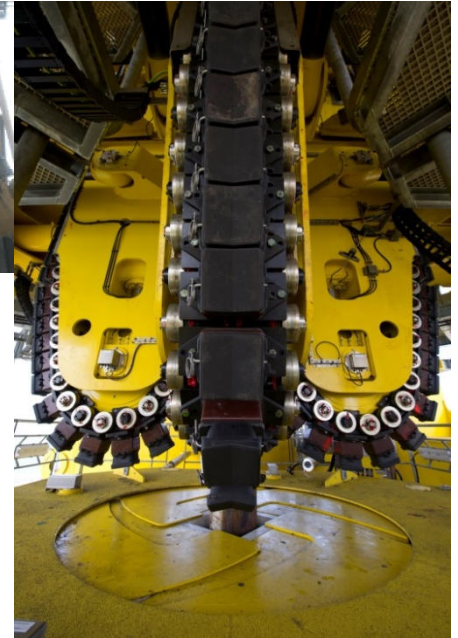

		100 t	200 t	300 t	400 t
BRAKING	t	120	225	352,5	500
PULLING POWER SUPPLY		HYDRAU	ELEC	ELEC	ELEC
LAYING SPEED HALF LOAD	m/min	16	16	34	40
LAYING SPEED FULL LOAD	m/min	16	16	17	30
MAX. RECOVERY SPEED	m/min	16	12	15	22
PRODUCT TYPE*	F / R / U / W	F / R / U	F / R	F / R / U / W	F / R / U
PRODUCT DIAMETER RANGE	mm	50 > 600	20 > 600	100 > 630	100 > 600
MAX. CLEARANCE	mm	1 000	1 650	2 000	2 000
CLAMPING FORCE RANGE	t/m	4 > 69	10 > 125	20 > 150	10 > 123
CONTACT LENGHT	m	6	5	7,75	9
MIN. FRICTION FACTOR		0,07	0,07	0,07	0,09
OVERALL DIMENSIONS					
LENGHT	mm	6 000	10 300	9 600	8 400
WIDE	mm	6 000	10 300	9 600	8 000
HEIGHT	mm	7 900	8 900	10 900	11 700
WEIGHT	t	75	165	280	290

\*FLEXIBLE / RIGID / UMBILICAL / WIRE ROPE

Non contractual data | Contact us for details | REEL © 2016