




CAROUSELS

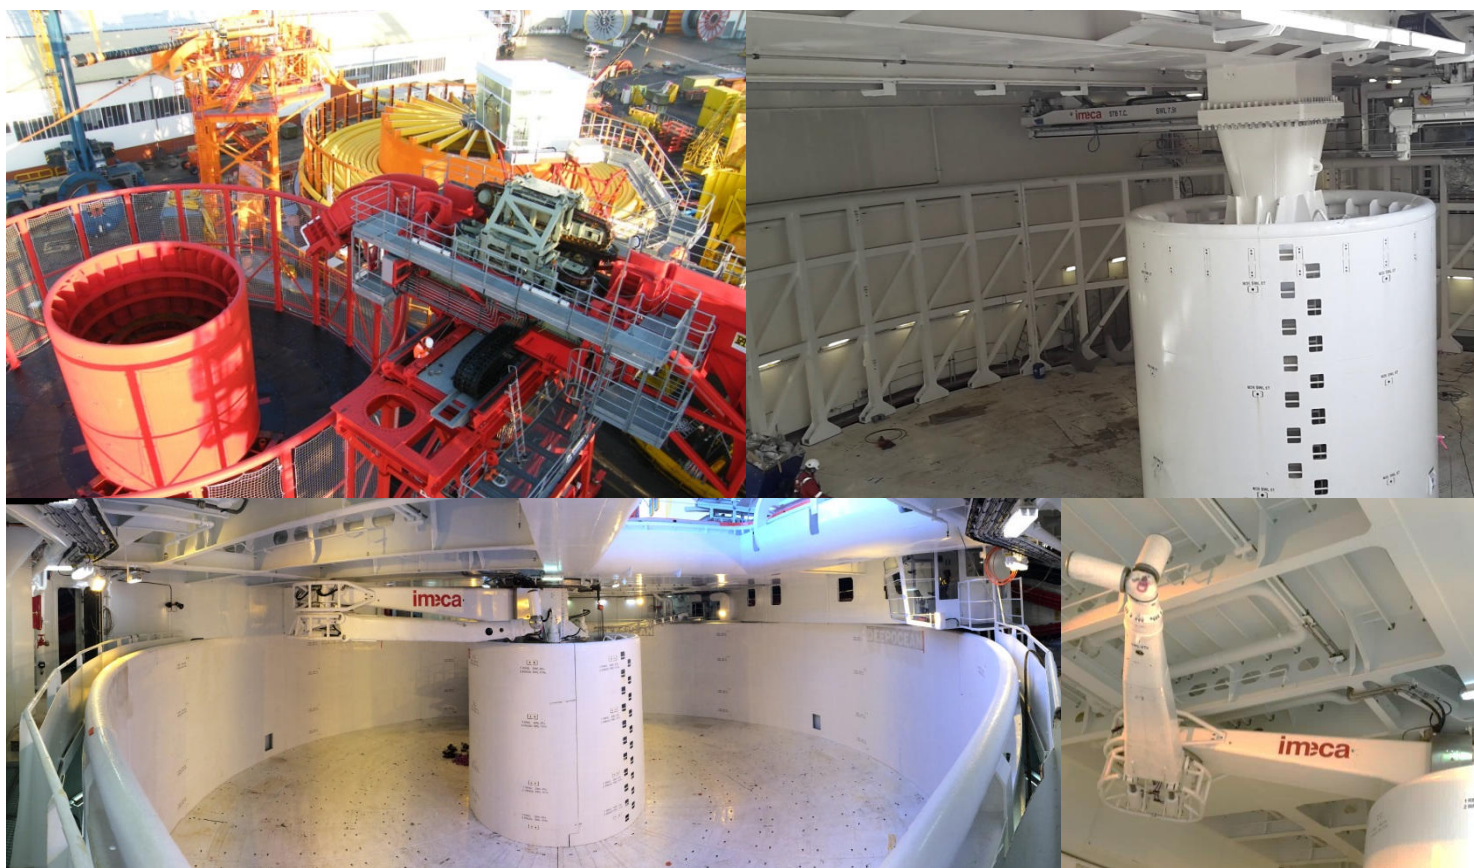

Highlights

- › DNV Certified
- › Easy greasing rollers and tracks
- › Removable Central Bearing under full load
- › Wide amount of lashing points

Options

- › Open walls and Core
- › Roof instead of walls
- › Fast Stop 5s under full load
- › Designed with the Hull
- › Spooling: chutes, travelling crane or arm

		600 t	1000 t	2000 t	3000 t	4000 t	5000 t	7000 t
BASKET OUTER DIAMETER	m	15	19	24	24	26	26	27
BASKET INNER DIAMETER	m	4	5	5	6	5	5	6
BASKET HEIGHT	m	5	5	6	6	6	6	6
WEIGHT	t	220	260	280	310	300	330	440
ROLLER TRACKS		2	2	2	2	3	3	4
ROLLER QUANTITY		45	50	80	80	120	120	288
ROTATION SPEED	rpm	1	1	1	1	1	1	1
MAX LAYING SPEED	m/min	20	20	20	20	25	25	25
MOTOR POWER INSTALLED	kW	4x75	4x75	4x105	4x105	4x105	6x105	8x105

Non contractual data | Contact us for details | REEL © 2016